




Record your model number:


⚠ WARNING: Risk of scalding. High water temperature can cause severe burns. Set the valve water temperature at or below 120°F (49°C). Refer to the temperature adjustment instructions for the valve. Follow all local plumbing and building codes.

- 2A. Cut away the foam guard.
 - 5A. Press the stems to pop them to the extended position.
 - 11A. Tighten the setscrews using the provided 2.5 mm hex wrench.
 - 13A. **Maximum Temperature Adjustment:** Turn the handle to the 37°C position.
 - 13B. Rotate the stem and test the water temperature. Set between 36°C and 38°C.
 - 13C. Reinstall the stem extension and handle, aligned with the 37°C position.
 - 14A. **Clean the Screens:** Remove the trim parts.
 - 14B. Remove the cartridges. Note the hot and cold positions for reinstallation.
 - 14C. Rinse debris from the screens, then reinstall all parts.
- Need help?** Contact our Customer Care Center.


This product is covered under the **Five-Year Limited Warranty for KOHLER® Faucets**, found in the packed Compliance Certification.

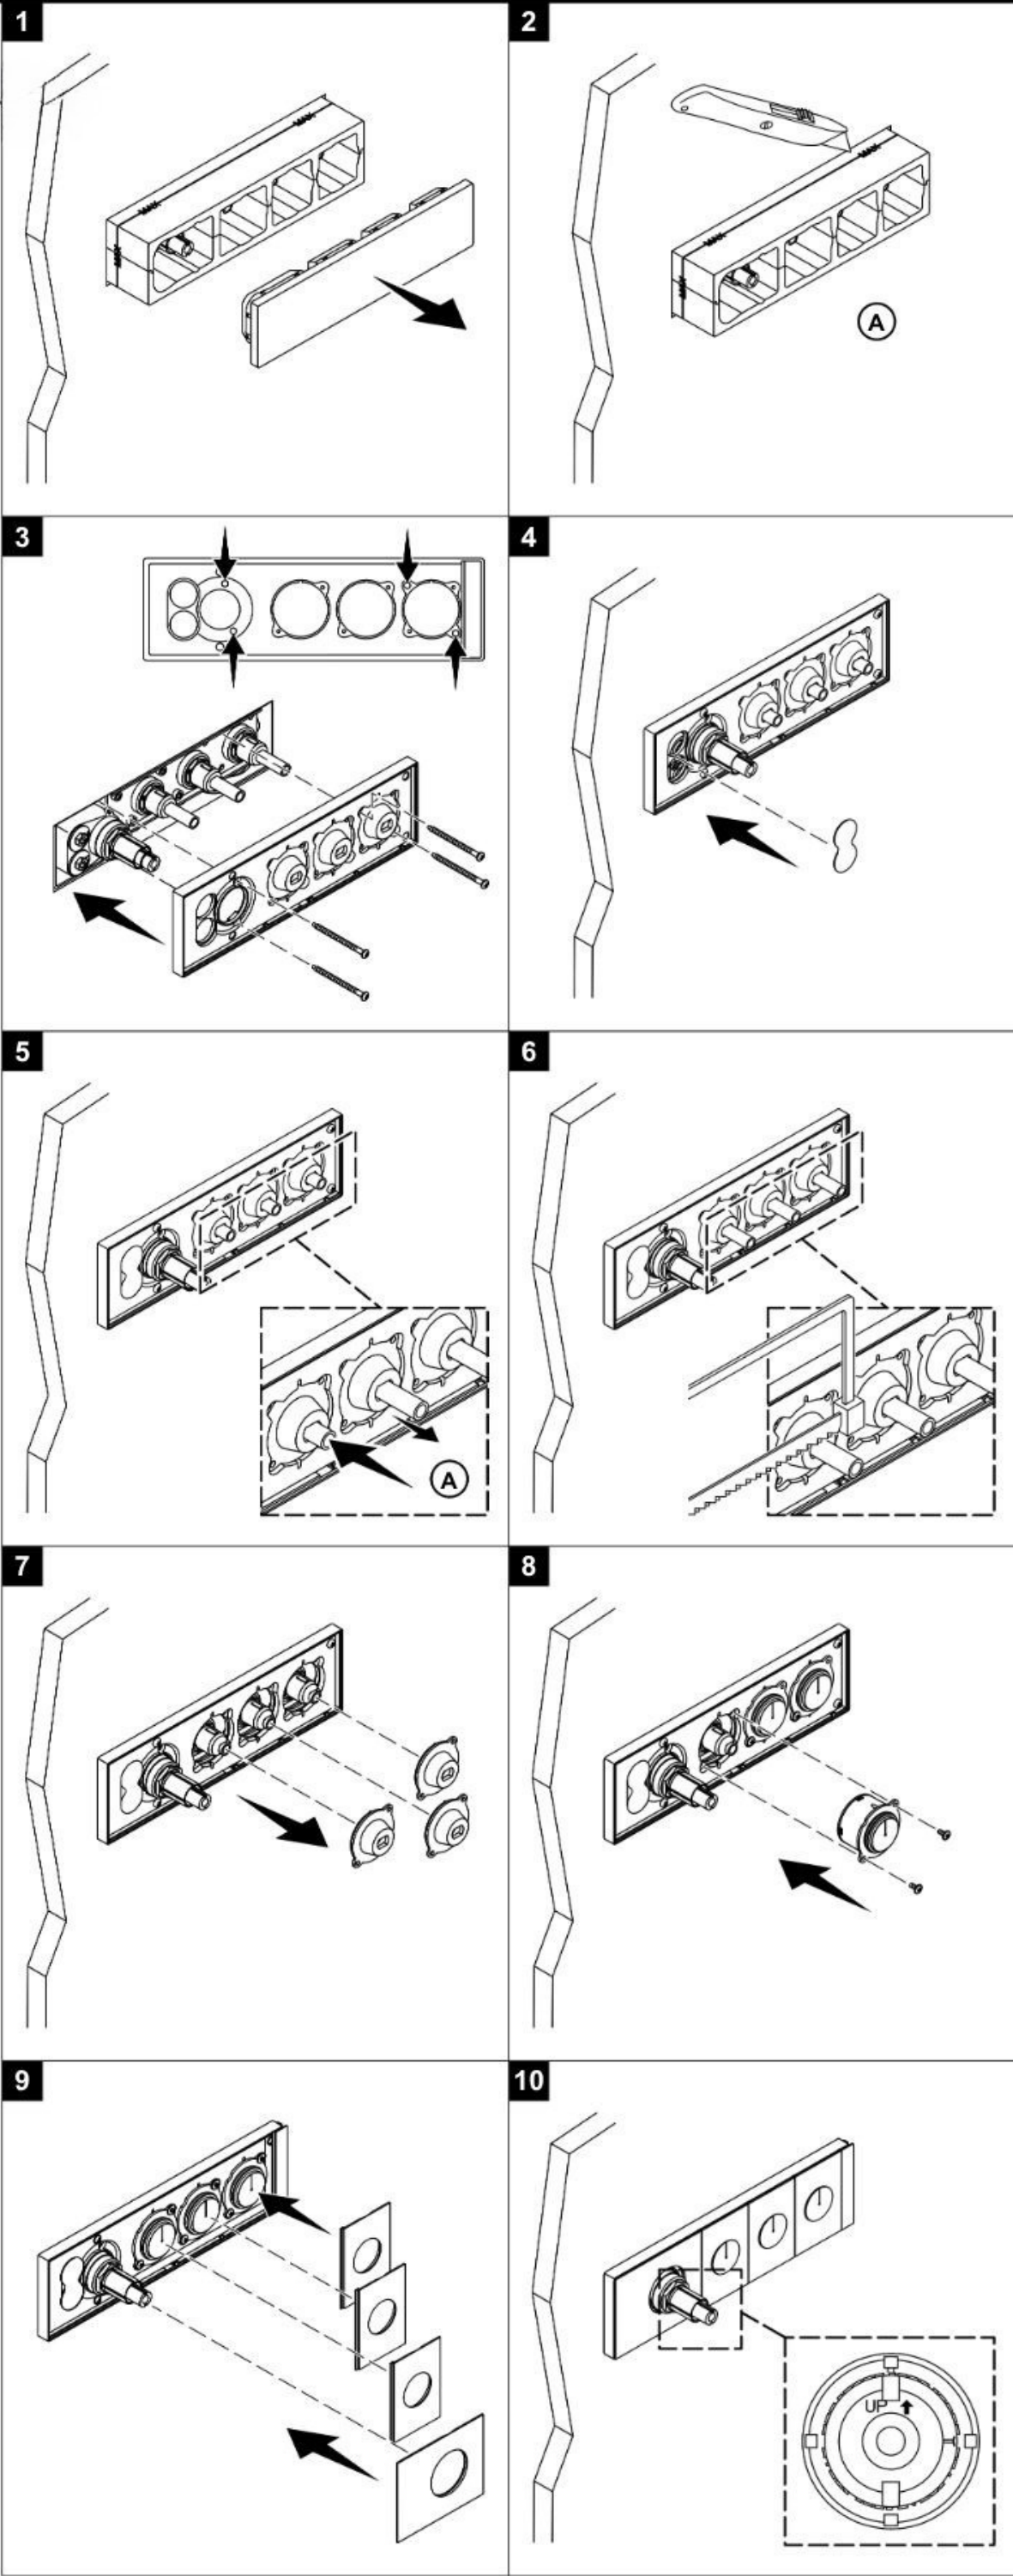


11

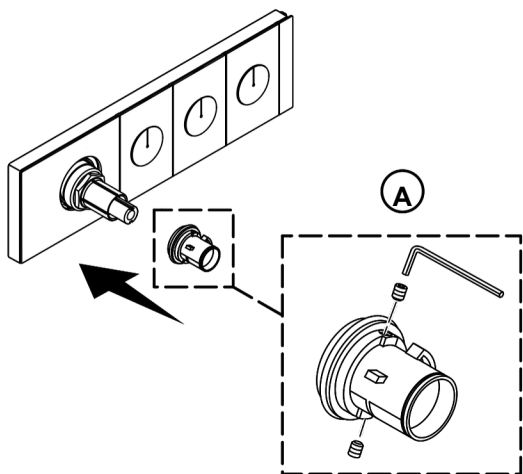

12

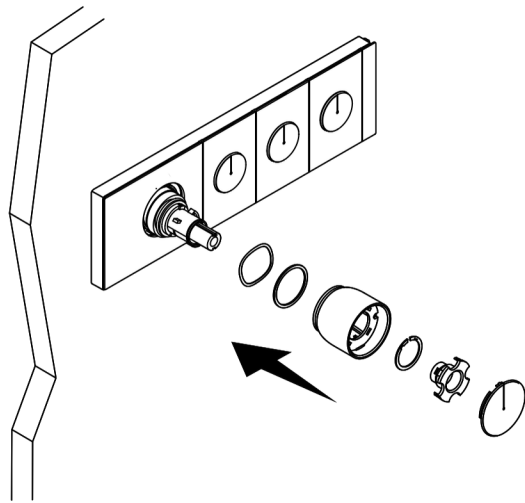

13

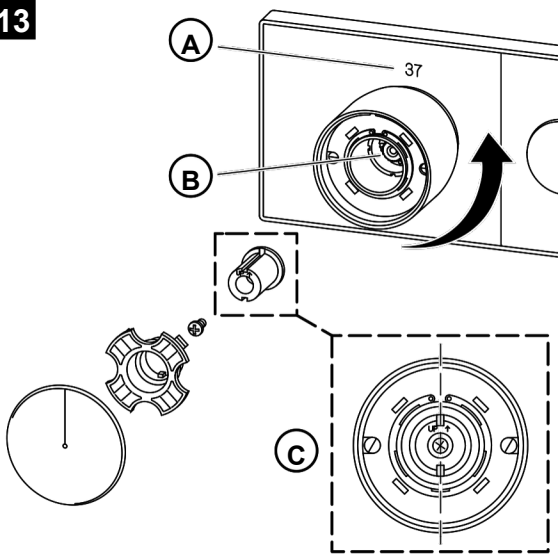

14

