

Warranty

Whilst every Lucent product is manufactured to the highest quality standards, we offer a comprehensive Warranty for complete peace of mind.

Residential Use

20 Years	Replacement cartridge
10 Years	Replacement products or parts
2 Year	Labour

Commercial Use

15 Years	Replacement cartridge
7 Years	Replacement products or parts
1 Year	Labour

Warranty may become void due to any of the following:

- Inability to provide proof of purchase or equivalent documentation
- Product not installed by a licensed Plumber
- Failure to install product to national standards and state regulations
- Failure to install product in accordance with manufacturers installation instructions
- Pressure and Temperature Requirements:

- Hydro Static inlet pressure range: 150 to 500kPa
- Maximum hot water temperature 75 degree celsius
- Recommended operating temperatures: 1 to 75 degrees celsius

- Fitting of non-approved flow controllers in tap bodies or outlets
- If products are used for outdoor applications.
- Product used for non-potable water applications.
- Damage because of insufficient flushing of lines prior to installation. Service, repairs, or installation of non-Lucent replacement parts undertaken without Lucent's prior written approval.
- Damage to finishes caused by non adherence to cleaning instructions.

Cleaning Instructions:



CLEAN MICROFIBRE
CLOTH



SOAPY WATER



PH BALANCE
SOAP - BASED
CLEANSER

WARRANTY SERVICE

For all warranty service calls, please contact your local store.

Phone: 1300 474 714


E-mail: warranty@lucentdesigns.com.au



INS_1001.pdf rev.1.0

LUCENT[®]

Installation and Operating Instructions

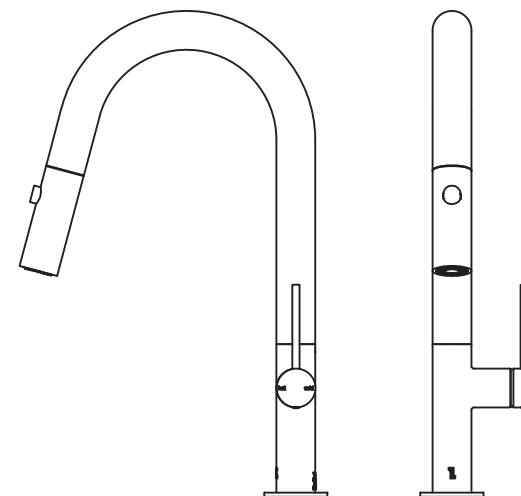

11004 | 12004 | 14004 | 16004 | 18004
**Argia Pull Out Spray Sink Mixer 200mm
Curve Spout Lead Free**



Thank you for purchasing a quality Lucent product. Please note that this product must be installed by a qualified and registered plumber who is compliant with all the relevant regional requirements and who holds current certification.

Note: Please read all instructions prior to installation to limit warranty disputes should a claim arise.

Water Supply Requirements



recommended
working pressure
350KPa



maximum hot
water temperature
75 degrees

Pressure

- Recommended Minimum Hydrostatic Pressure: 150 to 500 kPa
- This pressure may be exceeded only under test conditions.
- Where hydrostatic pressure exceeds 500kPa, pressure limiting valve must be installed as per AS/NZS 3500

Temperature

- Water Temperature Range: 1°C to 75°C

Suitable Hot water Units

- Storage Tank: Yes
- Continuous Flow: Yes




Installation Instructions

Note to Plumber: Please provide this leaflet to the owner after installation.


STEP 1

Insert the mixer assembly into the sink or benchtop until the mixer seats.

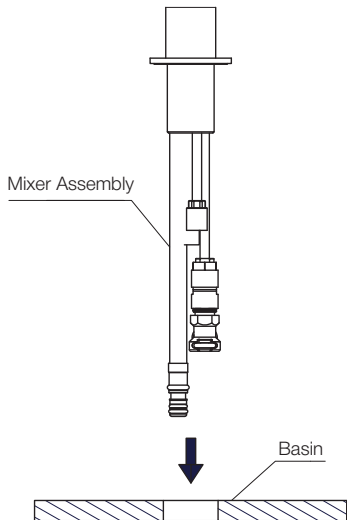


STEP 2

Ensure the stainless steel washer is in place, tighten the backing nut until the mixer is firmly mounted.

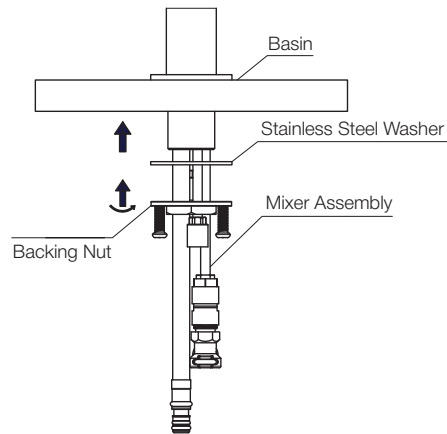


STEP 3

Firmly tighten the locking screws.

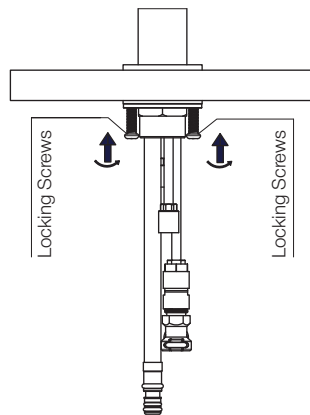


STEP 4

Screw the provided flexible hoses into the mixer connections.

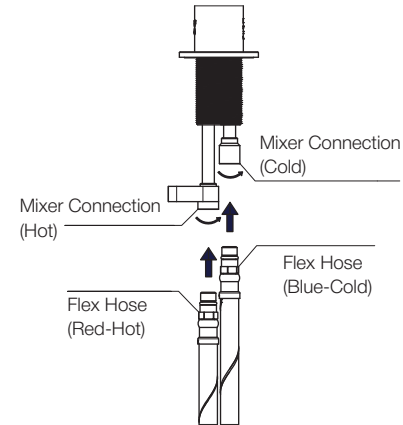

STEP 5

Connect the flexible pullout hose to female quick connector. Attach the pullout hose weight in a vertical plane just above the loop.

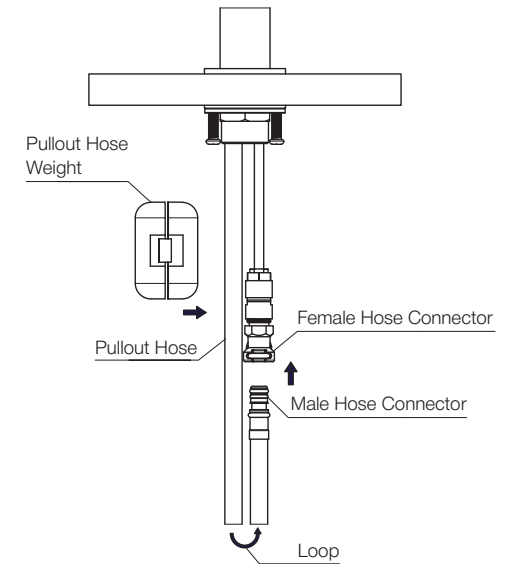

STEP 6

Ensuring correct alignment install Handle onto the Mixer Cartridge. Secure using the provided Hex Key.

