

Warranty

Whilst every Lucent product is manufactured to the highest quality standards, we offer a comprehensive Warranty for complete peace of mind.

Residential Use

15 Years Replacement Product or Parts
1 Years Labour

Commercial Use

7 Years Replacement Product or Parts
1 Year Labour
1 Year Ceramic Disc and Jumper Valve

Warranty may become void due to any of the following:

- Inability to provide proof of purchase or equivalent documentation
- Product not installed by a licensed Plumber
- Failure to install product to national standards and state regulations
- Failure to install product in accordance with manufacturers installation instructions
- Pressure and Temperature Requirements:

- Static inlet pressure range: 150 to 500kPa
- Maximum hot water temperature 75 degree celsius
- Recommended operation temperatures: 1 – 75 degrees celsius

- Fitting of non-approved flow controllers in tap bodies or outlets
- If products are used for outdoor applications.
- Product used for incorrect application, non-potable water, gravity fed applications etc.
- Damage because of insufficient flushing of lines prior to installation. Service, repairs, or installation of non-Lucent replacement parts undertaken without Lucent's prior written approval.
- Damage to finishes caused by non adherence to cleaning instructions.

Cleaning Instructions:



CLEAN MICROFIBRE
CLOTH



SOAPY WATER



PH BALANCE
SOAP - BASED
CLEANSER

Warranty Service


For all warranty service calls please contact your local store.
Phone: 1300 474 714
E-mail: warranty@lucentdesigns.com.au



INS_93309.pdf rev.1.0

LUCENT[®]

Installation and Operating Instructions

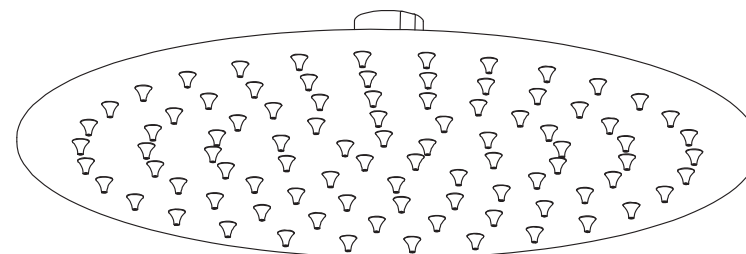

ELANNA RAIN SHOWER HEAD 92205 | 92206 RANGE



Thank you for purchasing a quality Lucent product. Please note that this product must be installed by a qualified and registered plumber who is compliant with all the relevant regional requirements and who holds current certification.

Note: Please read all instructions prior to installation to limit warranty disputes should a claim arise.

Water Supply Requirements



recommended
working pressure
350KPa



maximum hot
water temperature
75 degrees

Pressure

- Maximum Hydrostatic Pressure - 1000kPa
- This pressure may be exceeded only under test conditions as per AS/NZS3500,
- Recommended Minimum Hydrostatic Pressure – 150 kPa

Temperature

- Water Temperature Range – 1°C to 75°C

Suitable Hot water Units

- Storage Tank: Yes
- Continuous Flow: Yes
- Gravity Feed: Not recommended.

Installation Instructions

Note to Plumber: Please provide this leaflet to the owner after installation.

STEP 1

Ensuring the Rubber Washer and Flow Restrictor are in place.
Thread the Shower Head onto the Shower Arm.

