

Warranty

Whilst every Lucent product is manufactured to the highest quality standards, we offer a comprehensive Warranty for complete peace of mind.

Residential Use

15 Years Replacement product or parts
10 Years Finish / 5 years matte black
1 Year Labour & Flexible hoses

Commercial Use

5 Years Replacement product or parts
1 Year Labour & Surface Finish

Warranty may become void due to any of the following:

- Inability to provide proof of purchase or equivalent documentation
- Product not installed by a licensed Plumber
- Failure to install product to national standards and state regulations
- Failure to install product in accordance with manufacturers installation instructions
- Pressure and Temperature Requirements:

- Hydro Static inlet pressure range: 150 to 500kPa
- Maximum hot water temperature 75 degree celsius
- Recommended operating temperatures: 1 to 75 degrees celsius

- Fitting of non-approved flow controllers in tap bodies or outlets
- If products are used for outdoor applications.
- Product used for non-potable water applications.
- Damage because of insufficient flushing of lines prior to installation. Service, repairs, or installation of non-Lucent replacement parts undertaken without Lucent's prior written approval.
- Damage to finishes caused by non adherence to cleaning instructions.

Cleaning Instructions:



CLEAN MICROFIBRE
CLOTH



SOAPY WATER



PH BALANCE
SOAP - BASED
CLEANSER


WARRANTY SERVICE

For all warranty service calls, please contact your local store.
Phone: 1300 474 714
E-mail: warranty@lucentdesigns.com.au




LUCENT[®]

Installation and Operating Instructions



92211
COMBINATION SHOWER
SET WITH SQUARE LINE ARM

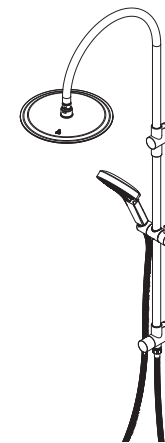

92212
COMBINATION SHOWER
SET WITH GOOSENECK ARM



Thank you for purchasing a quality Lucent product. Please note that this product must be installed by a qualified and registered plumber who is compliant with all the relevant regional requirements and who holds current certification.

Note: Please read all instructions prior to installation to limit warranty disputes should a claim arise.

Water Supply Requirements



recommended
working pressure
350KPa



maximum hot
water temperature
75 degrees

Pressure

- Recommended Minimum Hydrostatic Pressure: 150 to 500 kPa
- This pressure may be exceeded only under test conditions.
- Where hydrostatic pressure exceeds 500kPa, pressure limiting valve must be installed as per AS/NZS 3500

Temperature

- Water Temperature Range: 1°C to 75°C

Suitable Hot water Units

- Storage Tank: Yes
- Continuous Flow: Yes

NOTE: An additional Back Flow Prevention Device may be needed to comply with AS 3500.



Prior to Installation


Please check the product for imperfections before installing.

If water pressure exceeds 500 kPa operating pressure, an approved pressure limiting device must be installed. As per AS/NZS 3500.1-2021.

All Pipe work must be thoroughly flushed prior to the installation of this product.


Any modifications made without prior written consent from Lucent will void the warranty.

Installation Instructions

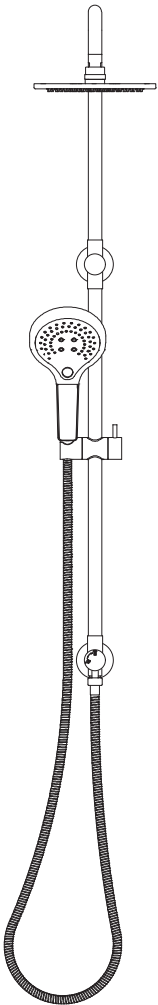


STEP 1

Apply PTFE thread tape to the threaded outlet, and screw the adaptor onto the threaded outlet. Tighten using a 12mm hex key.

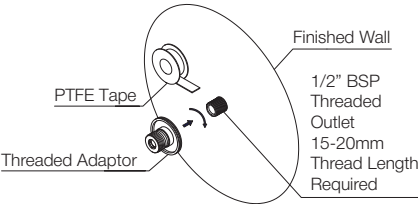


STEP 2

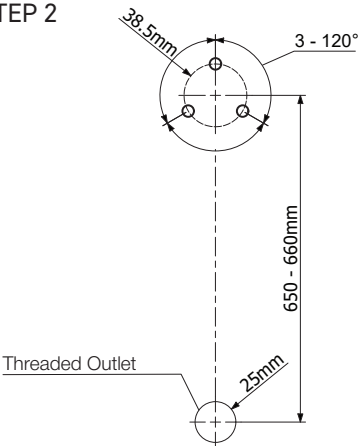


STEP 3

After drilling the fixing holes, secure the wall mount adaptor using the appropriate fasteners

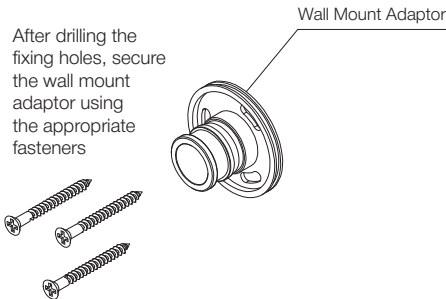


STEP 4

Insert the holder onto the rail tube. Insert the wall connector bracket onto the rail tube, secure using the provided hex key. Insert shower arm into the wall connector bracket, secure using the provided hex key.

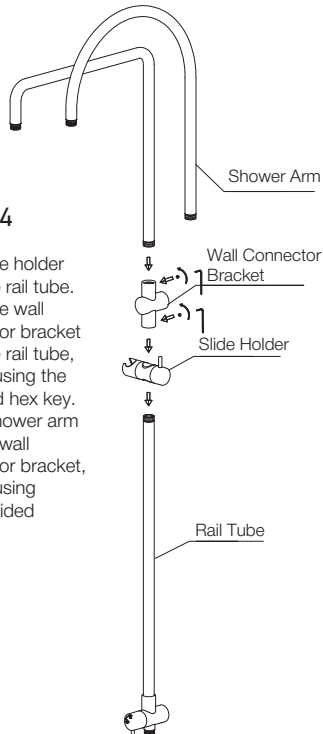


STEP 5

Push the dress plate onto the wall mount adaptor. Push the shower assembly onto the wall mount adaptor and threaded adaptor. Secure using the provided hex key.

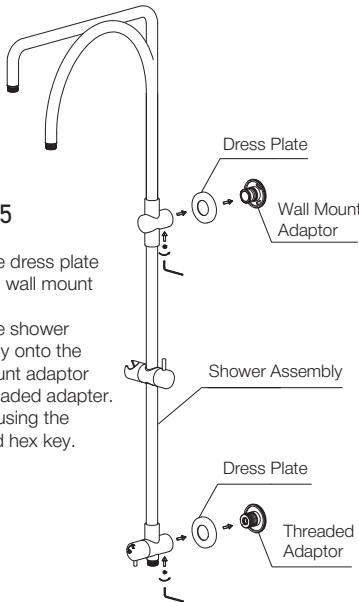

STEP 6

Ensure the flow restrictor is fitted. Screw the shower head onto the shower arm



STEP 7

Ensuring the flow restrictor is installed. Screw the shower hose onto the shower rail. Screw the hand shower onto the shower hose.

