

Warranty

Whilst every Lucent product is manufactured to the highest quality standards, we offer a comprehensive Warranty for complete peace of mind.

Residential Use		Commercial Use	
20 Years	Replacement Cartridge	15 Years	Replacement Cartridge
10 Years	Replacement products or parts	7 Years	Replacement products or parts
1 Year	Labour	1 Year	Labour

Warranty may become void due to any of the following:

- Inability to provide proof of purchase or equivalent documentation
- Product not installed by a licensed Plumber
- Failure to install product to national standards and state regulations
- Failure to install product in accordance with manufacturers installation instructions
- Fitting of non-approved flow controllers in tap bodies or outlets
- If products are used for outdoor applications.
- Product used for non-potable water applications.
- Damage because of insufficient flushing of lines prior to installation. Service, repairs, or installation of non-Lucent replacement parts undertaken without Lucent's prior written approval.
- Damage to finishes caused by non adherence to cleaning instructions.

Cleaning Instructions:



CLEAN MICROFIBRE
CLOTH



SOAPY WATER



PH BALANCE
SOAP - BASED
CLEANSER

Warranty Service


For all warranty service calls please contact your local store.
Phone: 1300 474 714
E-mail: warranty@lucentdesigns.com.au



INS_1020.pdf rev.1.0

LUCENT[®]

Installation and Operating Instructions

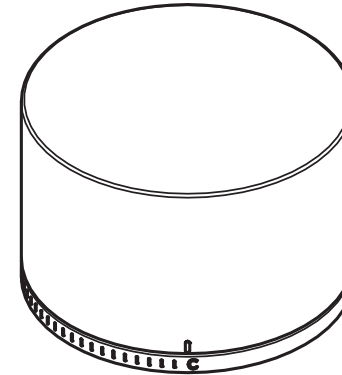

13028 PROGRESSIVE HOB MIXER



Thank you for purchasing a quality Lucent product. Please note that this product must be installed by a qualified and registered plumber who is compliant with all the relevant regional requirements and who holds current certification.

Note: Please read all instructions prior to installation to limit warranty disputes should a claim arise.

Water Supply Requirements



recommended
working pressure
350KPa



maximum hot
water temperature
75 degrees

Pressure

- Recommended Minimum Hydrostatic Pressure: 150 to 500 kPa
- This pressure may be exceeded only under test conditions.
- Where hydrostatic pressure exceeds 500kPa, pressure limiting valve must be installed as per AS/NZS 3500

Temperature

- Water Temperature Range: 1°C to 75°C

Suitable Hot water Units


- Storage Tank: Yes
- Continuous Flow: Yes

Installation Instructions

Note to Plumber: Please provide this leaflet to the owner after installation.


STEP 1

Ensuring the Hob Mixer is in the closed position, Seat the Mixer into the Basin Top and align the indicator ring appropriately.

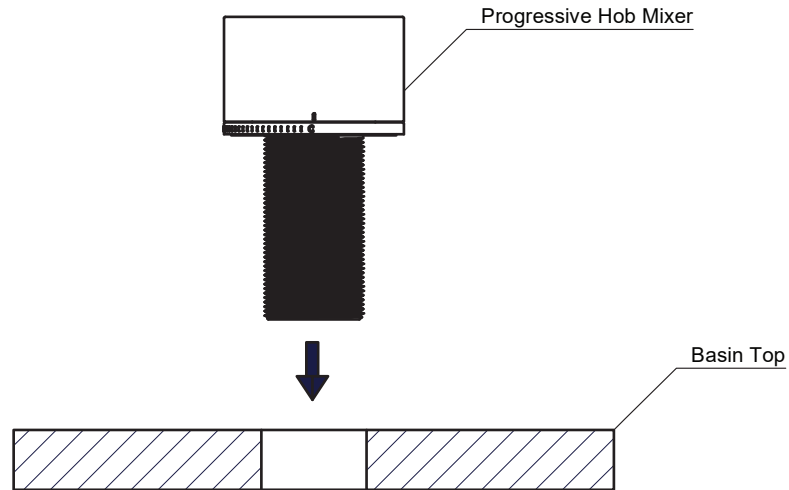


STEP 2

Ensuring the Stainless Steel Washer is in place, tighten the Backing Nut until the Mixer is firmly mounted to the Basin.

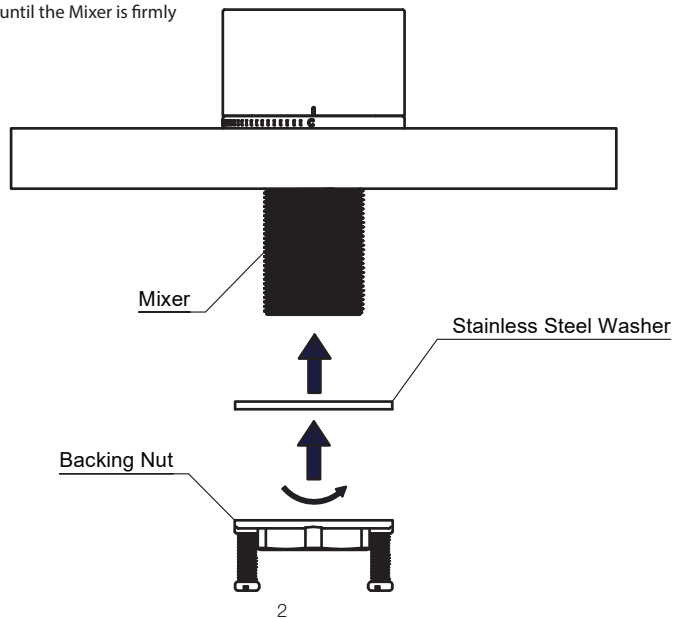

STEP 3

Firmly tighten the Locking Screws

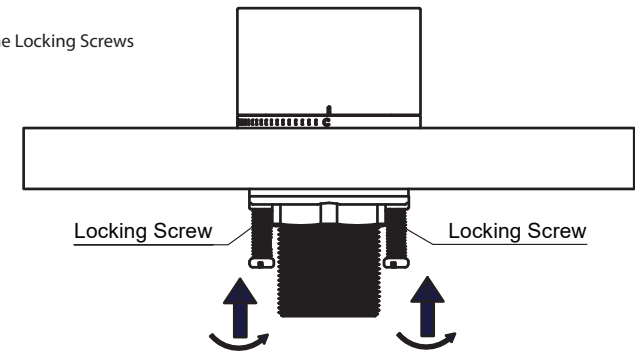

STEP 4

Taking note of the markings on the bottom of the mixer, Install the provided Flex Hoses.

