

INTEGRATED SMART TOILET

Attica Oskar Smart Toilet Rimless



Product Specifications:

Size: 700x400x475mm

Weight: 46.5kg

Roughing-in:

S trap: 50-220mm

P trap: 180mm



Flushing method:

Siphonic jet

Flushing volume:

Half flush: 3L

Full flush: 4.5L

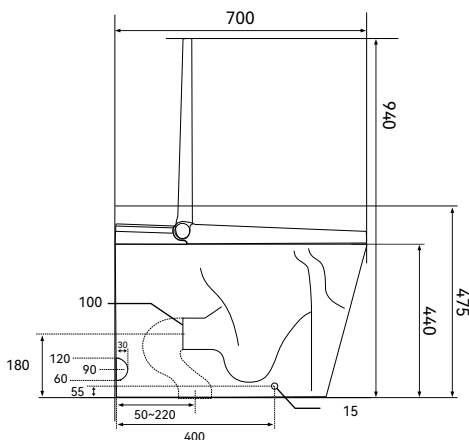

TECHNICAL SPECIFICATION

Water Supply Connector		G ½ on unit with G ½ flex hose
Rated Voltage		AC 220-240V, 50/60Hz
Rated Power		1200W *
Length of Powder Cord		1.2m
Water Supply Pressure		150~650KPA (1.5~6.5 Bar)
Water Supply Temperature		4-35°C
Ambient Temperature		5-40°C
Protection Level		IPX4
Overheat Protection		Thermal Fuse / Thermostat
Other Safety Device		Residual Current Devices
Wash Device	Flow Rate	650 ml/min
	Water Temperature	Room temp, 34°C, 37°C, 40°C
	Wash Cycle Time	95 seconds
	Heating Mode	Instant heating
	Water Tank Volume	4.5L
	Water Heater Power	1200W
Dry Device	Speed of Air	≥4m/s
	Dryer Power	225W
	Dry Cycle Time	2 Minutes
	Warm Air Temperature	Room temp, 35°C, 45°C, 55°C
Heated Seat	Heated Power	40W
	Seat Temperature	Room temp, 34°C, 37°C, 40°C

▲ The power consumption depends on the inlet water temperature, environment temperature, setting temperature.

FEATURES

- Front and rear wash
- Oscillating nozzle wash
- Instant water heating
- Heated seat
- Off-seat auto flush
- 4-level temperature adjustment
- 4-level warm-air drying
- 4-level water pressure adjustment
- Self-cleaning nozzle with position adjustment
- Multifunction remote and side knob control
- Soft-closing seat and lid
- HD LED display
- 12V low-voltage system
- Leakage protection
- Flame-retardant materials
- Antibacterial seat
- IPX4 waterproof protection
- Power-outage flushing
- Energy-saving mode
- Integrated night light

UPGRADED FEATURES

HIGH & TOP configuration:

- Foot sensor flush
- Decorative lighting
- Not limited by water pressure
- Automatic flip lid
- Foot sensor seat/lid control
- Built-in aromatherapy
- UV sterilization